



T: +44 (0) 1707 663 883
F: +44 (0) 1707 663 882
W: www.orldight.com

P30 is an exceptionally high performance LED lamp built to last. It is a premium quality solid state lighting product precisely engineered and manufactured with state of the art technologies and materials.

Proprietary driving circuit enables P30 to replace traditional incandescent/halogen lamp, up to 75 Watt, directly without additional modification or transformer. Digital dimming is available for further energy saving on P30L model.



P30/P30L - LED LAMP

Dimensions

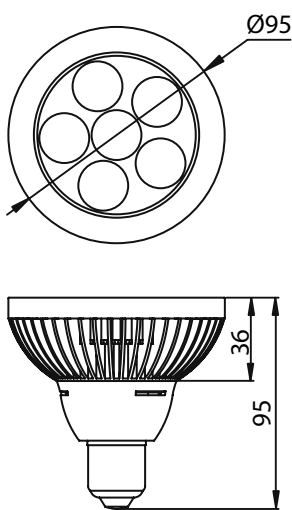


Figure 1: P30 dimensions



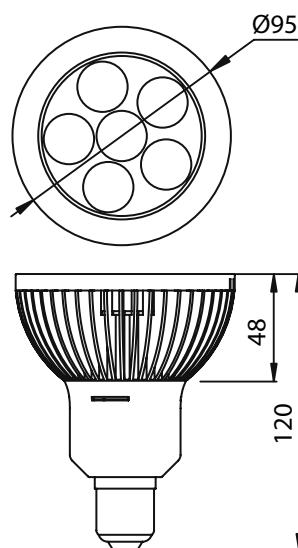


Figure 2: P30L dimensions

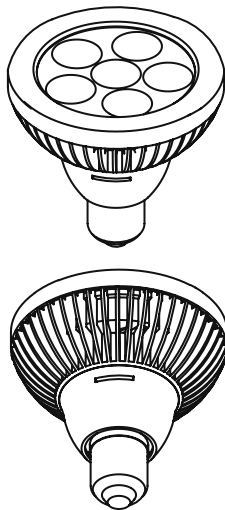

Unit: mm
Tolerance: ± 2.5 mm


Absolute Maximum Rating

Parameter	Rating	Units
LED Junction Temperature	125	°C
Aluminum Heat sink Temperature	70	°C
Operating Temperature	-30 ~ +40	°C
Storage Temperature	-40 ~ +60	°C
AC Input Voltage	100 ~ 240	V
Equilibrium Temperature	55	°C

Specifications

P30/P30L LED Lamp	
Power Consumption	1.0 Watt
Field Angle	25° / 40° / 60° / 140°
Color Temperature	3000 / 4000 / 6000K
CRI	75 / 90
Dimming	100%, 75%, 50%, 25%
Weight	215g / 280g (P30L)
Base	E26 / E27

Light Patterns

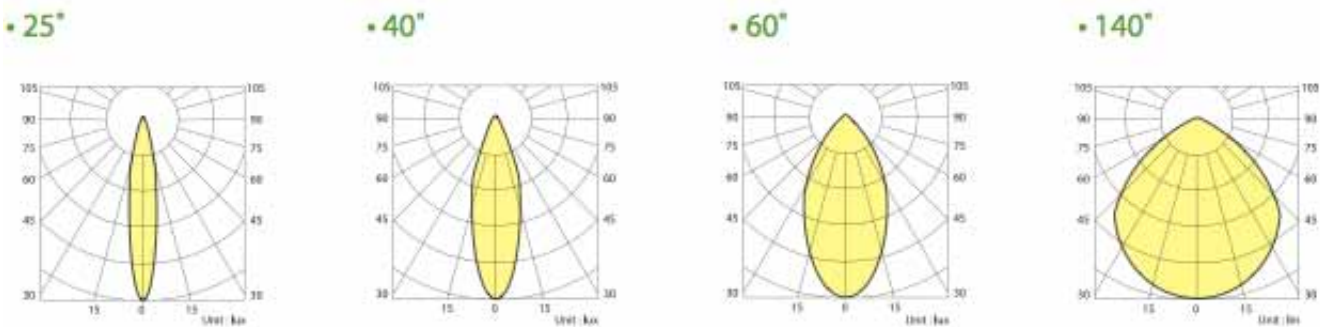

Lifetime

