

MARINEFLEX-SIDE-MINI-TW

Cable Entry


INLINE
Cable Entry




LEFT/RIGHT
Cable Entry



REAR
Cable Entry




END CAP



Mounting Profile Information



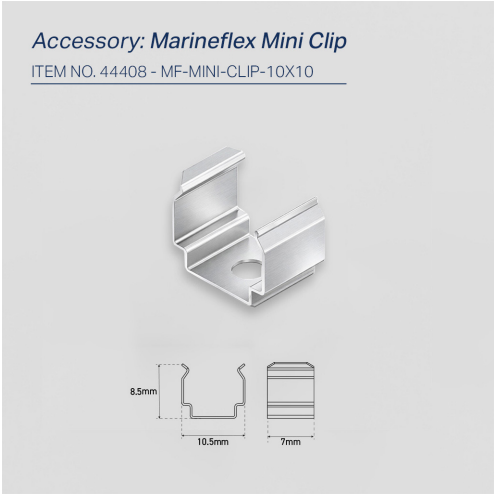

Driver Configuration Table

MARINEFLEX-SIDE-MINI-TW 11.6W/M			
BC Code	**DRIVER (Non-Dim)**	**SPECIFICATION**	**MARINEFLEX LENGTH**
15210	ORLRPV2435	LED Driver, DC24V, 35W	Up to 3M
15214	ORLRPV2460	LED Driver, DC24V, 60W	Up to 5M
15199	ORLRPV24100	LED Driver, DC24V, 100W	Up to 8.5M
15203	ORLRPV24150	LED Driver, DC24V, 150W	Up to 10M
	INTERFACE		
34998	ORLDALIIF-12-24-36V-TW-RGBW-DT8	DALI DT8 TW RGBW INTERFACE	Up to 10M

MARINEFLEX-SIDE-MINI-TW

orlight®
FROM SOURCE TO SITE

Length Matrix

The MARINEFLEX-SIDE-MINI-TW can be cut every 41.7mm. The below table gives information on the overall length, obtained by adding the total cable entry length and end mould, to all the available cut lengths up to 10M. **If you require lengths beyond the standard 10M then please contact sales@orlight.com.**

Note: Allow for a tolerance of +/- 0.3mm on cut points.

		Total Length (mm)		
Segments	Luminaire/ Cutpoints	Inline+End	Left/Right+End	Rear+End
1	41.7	58.7	47.7	47.7
2	83.3	100.3	89.3	89.3
3	125.0	142.0	131.0	131.0
4	166.7	183.7	172.7	172.7
5	208.3	225.3	214.3	214.3
6	250.0	267.0	256.0	256.0
7	291.7	308.7	297.7	297.7
8	333.3	350.3	339.3	339.3
9	375.0	392.0	381.0	381.0
10	416.7	433.7	422.7	422.7
11	458.3	475.3	464.3	464.3
12	500.0	517.0	506.0	506.0
13	541.7	558.7	547.7	547.7
14	583.3	600.3	589.3	589.3
15	625.0	642.0	631.0	631.0
16	666.7	683.7	672.7	672.7
17	708.3	725.3	714.3	714.3
18	750.0	767.0	756.0	756.0
19	791.7	808.7	797.7	797.7
20	833.3	850.3	839.3	839.3
21	875.0	892.0	881.0	881.0
22	916.7	933.7	922.7	922.7
23	958.3	975.3	964.3	964.3
24	1000.0	1017.0	1006.0	1006.0
25	1041.7	1058.7	1047.7	1047.7
26	1083.3	1100.3	1089.3	1089.3
27	1125.0	1142.0	1131.0	1131.0
28	1166.7	1183.7	1172.7	1172.7
29	1208.3	1225.3	1214.3	1214.3
30	1250.0	1267.0	1256.0	1256.0
31	1291.7	1308.7	1297.7	1297.7
32	1333.3	1350.3	1339.3	1339.3
33	1375.0	1392.0	1381.0	1381.0
34	1416.7	1433.7	1422.7	1422.7
35	1458.3	1475.3	1464.3	1464.3
36	1500.0	1517.0	1506.0	1506.0
37	1541.7	1558.7	1547.7	1547.7
38	1583.3	1600.3	1589.3	1589.3
39	1625.0	1642.0	1631.0	1631.0
40	1666.7	1683.7	1672.7	1672.7
41	1708.3	1725.3	1714.3	1714.3
42	1750.0	1767.0	1756.0	1756.0
43	1791.7	1808.7	1797.7	1797.7
44	1833.3	1850.3	1839.3	1839.3
45	1875.0	1892.0	1881.0	1881.0

MARINEFLEX-SIDE-MINI-TW

orlight®
FROM SOURCE TO SITE

Length Matrix

		Total Length (mm)		
Segments	Luminaire/ Cutpoints	Inline+End	Left/Right+End	Rear+End
46	1916.7	1933.7	1922.7	1922.7
47	1958.3	1975.3	1964.3	1964.3
48	2000.0	2017.0	2006.0	2006.0
49	2041.7	2058.7	2047.7	2047.7
50	2083.3	2100.3	2089.3	2089.3
51	2125.0	2142.0	2131.0	2131.0
52	2166.7	2183.7	2172.7	2172.7
53	2208.3	2225.3	2214.3	2214.3
54	2250.0	2267.0	2256.0	2256.0
55	2291.7	2308.7	2297.7	2297.7
56	2333.3	2350.3	2339.3	2339.3
57	2375.0	2392.0	2381.0	2381.0
58	2416.7	2433.7	2422.7	2422.7
59	2458.3	2475.3	2464.3	2464.3
60	2500.0	2517.0	2506.0	2506.0
61	2541.7	2558.7	2547.7	2547.7
62	2583.3	2600.3	2589.3	2589.3
63	2625.0	2642.0	2631.0	2631.0
64	2666.7	2683.7	2672.7	2672.7
65	2708.3	2725.3	2714.3	2714.3
66	2750.0	2767.0	2756.0	2756.0
67	2791.7	2808.7	2797.7	2797.7
68	2833.3	2850.3	2839.3	2839.3
69	2875.0	2892.0	2881.0	2881.0
70	2916.7	2933.7	2922.7	2922.7
71	2958.3	2975.3	2964.3	2964.3
72	3000.0	3017.0	3006.0	3006.0
73	3041.7	3058.7	3047.7	3047.7
74	3083.3	3100.3	3089.3	3089.3
75	3125.0	3142.0	3131.0	3131.0
76	3166.7	3183.7	3172.7	3172.7
77	3208.3	3225.3	3214.3	3214.3
78	3250.0	3267.0	3256.0	3256.0
79	3291.7	3308.7	3297.7	3297.7
80	3333.3	3350.3	3339.3	3339.3
81	3375.0	3392.0	3381.0	3381.0
82	3416.7	3433.7	3422.7	3422.7
83	3458.3	3475.3	3464.3	3464.3
84	3500.0	3517.0	3506.0	3506.0
85	3541.7	3558.7	3547.7	3547.7
86	3583.3	3600.3	3589.3	3589.3
87	3625.0	3642.0	3631.0	3631.0
88	3666.7	3683.7	3672.7	3672.7
89	3708.3	3725.3	3714.3	3714.3
90	3750.0	3767.0	3756.0	3756.0
91	3791.7	3808.7	3797.7	3797.7
92	3833.3	3850.3	3839.3	3839.3
93	3875.0	3892.0	3881.0	3881.0
94	3916.7	3933.7	3922.7	3922.7

MARINEFLEX-SIDE-MINI-TW

orlight®
FROM SOURCE TO SITE

Length Matrix

		Total Length (mm)		
Segments	Luminaire/ Cutpoints	Inline+End	Left/Right+End	Rear+End
95	3958.3	3975.3	3964.3	3964.3
96	4000.0	4017.0	4006.0	4006.0
97	4041.7	4058.7	4047.7	4047.7
98	4083.3	4100.3	4089.3	4089.3
99	4125.0	4142.0	4131.0	4131.0
100	4166.7	4183.7	4172.7	4172.7
101	4208.3	4225.3	4214.3	4214.3
102	4250.0	4267.0	4256.0	4256.0
103	4291.7	4308.7	4297.7	4297.7
104	4333.3	4350.3	4339.3	4339.3
105	4375.0	4392.0	4381.0	4381.0
106	4416.7	4433.7	4422.7	4422.7
107	4458.3	4475.3	4464.3	4464.3
108	4500.0	4517.0	4506.0	4506.0
109	4541.7	4558.7	4547.7	4547.7
110	4583.3	4600.3	4589.3	4589.3
111	4625.0	4642.0	4631.0	4631.0
112	4666.7	4683.7	4672.7	4672.7
113	4708.3	4725.3	4714.3	4714.3
114	4750.0	4767.0	4756.0	4756.0
115	4791.7	4808.7	4797.7	4797.7
116	4833.3	4850.3	4839.3	4839.3
117	4875.0	4892.0	4881.0	4881.0
118	4916.7	4933.7	4922.7	4922.7
119	4958.3	4975.3	4964.3	4964.3
120	5000.0	5017.0	5006.0	5006.0
121	5041.7	5058.7	5047.7	5047.7
122	5083.3	5100.3	5089.3	5089.3
123	5125.0	5142.0	5131.0	5131.0
124	5166.7	5183.7	5172.7	5172.7
125	5208.3	5225.3	5214.3	5214.3
126	5250.0	5267.0	5256.0	5256.0
127	5291.7	5308.7	5297.7	5297.7
128	5333.3	5350.3	5339.3	5339.3
129	5375.0	5392.0	5381.0	5381.0
130	5416.7	5433.7	5422.7	5422.7
131	5458.3	5475.3	5464.3	5464.3
132	5500.0	5517.0	5506.0	5506.0
133	5541.7	5558.7	5547.7	5547.7
134	5583.3	5600.3	5589.3	5589.3
135	5625.0	5642.0	5631.0	5631.0
136	5666.7	5683.7	5672.7	5672.7
137	5708.3	5725.3	5714.3	5714.3
138	5750.0	5767.0	5756.0	5756.0
139	5791.7	5808.7	5797.7	5797.7
140	5833.3	5850.3	5839.3	5839.3
141	5875.0	5892.0	5881.0	5881.0
142	5916.7	5933.7	5922.7	5922.7
143	5958.3	5975.3	5964.3	5964.3

MARINEFLEX-SIDE-MINI-TW

orlight®
FROM SOURCE TO SITE

Length Matrix

		Total Length (mm)		
Segments	Luminaire/ Cutpoints	Inline+End	Left/Right+End	Rear+End
144	6000.0	6017.0	6006.0	6006.0
145	6041.7	6058.7	6047.7	6047.7
146	6083.3	6100.3	6089.3	6089.3
147	6125.0	6142.0	6131.0	6131.0
148	6166.7	6183.7	6172.7	6172.7
149	6208.3	6225.3	6214.3	6214.3
150	6250.0	6267.0	6256.0	6256.0
151	6291.7	6308.7	6297.7	6297.7
152	6333.3	6350.3	6339.3	6339.3
153	6375.0	6392.0	6381.0	6381.0
154	6416.7	6433.7	6422.7	6422.7
155	6458.3	6475.3	6464.3	6464.3
156	6500.0	6517.0	6506.0	6506.0
157	6541.7	6558.7	6547.7	6547.7
158	6583.3	6600.3	6589.3	6589.3
159	6625.0	6642.0	6631.0	6631.0
160	6666.7	6683.7	6672.7	6672.7
161	6708.3	6725.3	6714.3	6714.3
162	6750.0	6767.0	6756.0	6756.0
163	6791.7	6808.7	6797.7	6797.7
164	6833.3	6850.3	6839.3	6839.3
165	6875.0	6892.0	6881.0	6881.0
166	6916.7	6933.7	6922.7	6922.7
167	6958.3	6975.3	6964.3	6964.3
168	7000.0	7017.0	7006.0	7006.0
169	7041.7	7058.7	7047.7	7047.7
170	7083.3	7100.3	7089.3	7089.3
171	7125.0	7142.0	7131.0	7131.0
172	7166.7	7183.7	7172.7	7172.7
173	7208.3	7225.3	7214.3	7214.3
174	7250.0	7267.0	7256.0	7256.0
175	7291.7	7308.7	7297.7	7297.7
176	7333.3	7350.3	7339.3	7339.3
177	7375.0	7392.0	7381.0	7381.0
178	7416.7	7433.7	7422.7	7422.7
179	7458.3	7475.3	7464.3	7464.3
180	7500.0	7517.0	7506.0	7506.0
181	7541.7	7558.7	7547.7	7547.7
182	7583.3	7600.3	7589.3	7589.3
183	7625.0	7642.0	7631.0	7631.0
184	7666.7	7683.7	7672.7	7672.7
185	7708.3	7725.3	7714.3	7714.3
186	7750.0	7767.0	7756.0	7756.0
187	7791.7	7808.7	7797.7	7797.7
188	7833.3	7850.3	7839.3	7839.3
189	7875.0	7892.0	7881.0	7881.0
190	7916.7	7933.7	7922.7	7922.7
191	7958.3	7975.3	7964.3	7964.3
192	8000.0	8017.0	8006.0	8006.0

MARINEFLEX-SIDE-MINI-TW

orlight®
FROM SOURCE TO SITE

Length Matrix

		Total Length (mm)		
Segments	Luminaire/ Cutpoints	Inline+End	Left/Right+End	Rear+End
208	8666.7	8683.7	8672.7	8672.7
209	8708.3	8725.3	8714.3	8714.3
210	8750.0	8767.0	8756.0	8756.0
211	8791.7	8808.7	8797.7	8797.7
212	8833.3	8850.3	8839.3	8839.3
213	8875.0	8892.0	8881.0	8881.0
214	8916.7	8933.7	8922.7	8922.7
215	8958.3	8975.3	8964.3	8964.3
216	9000.0	9017.0	9006.0	9006.0
217	9041.7	9058.7	9047.7	9047.7
218	9083.3	9100.3	9089.3	9089.3
219	9125.0	9142.0	9131.0	9131.0
220	9166.7	9183.7	9172.7	9172.7
221	9208.3	9225.3	9214.3	9214.3
222	9250.0	9267.0	9256.0	9256.0
223	9291.7	9308.7	9297.7	9297.7
224	9333.3	9350.3	9339.3	9339.3
225	9375.0	9392.0	9381.0	9381.0
226	9416.7	9433.7	9422.7	9422.7
227	9458.3	9475.3	9464.3	9464.3
228	9500.0	9517.0	9506.0	9506.0
229	9541.7	9558.7	9547.7	9547.7
230	9583.3	9600.3	9589.3	9589.3
231	9625.0	9642.0	9631.0	9631.0
232	9666.7	9683.7	9672.7	9672.7
233	9708.3	9725.3	9714.3	9714.3
234	9750.0	9767.0	9756.0	9756.0
235	9791.7	9808.7	9797.7	9797.7
236	9833.3	9850.3	9839.3	9839.3
237	9875.0	9892.0	9881.0	9881.0
238	9916.7	9933.7	9922.7	9922.7
239	9958.3	9975.3	9964.3	9964.3
240	10000.0	10017.0	10006.0	10006.0

NOTE: The max length power from one side is 10 meters. The overall lengths are including Ends, please also allow for +/- 0.3mm Tolerance on overall length. Products are injection moulded by machine that is man operated therefore please allow a tolerance of 5mm.